


# SPOTLIGHT WITH FIXED LENS

## KVP-A2162 12



karjalanvalaistuspalvelu.fi | info@karjalanvalaistuspalvelu.fi | 040 900 6950

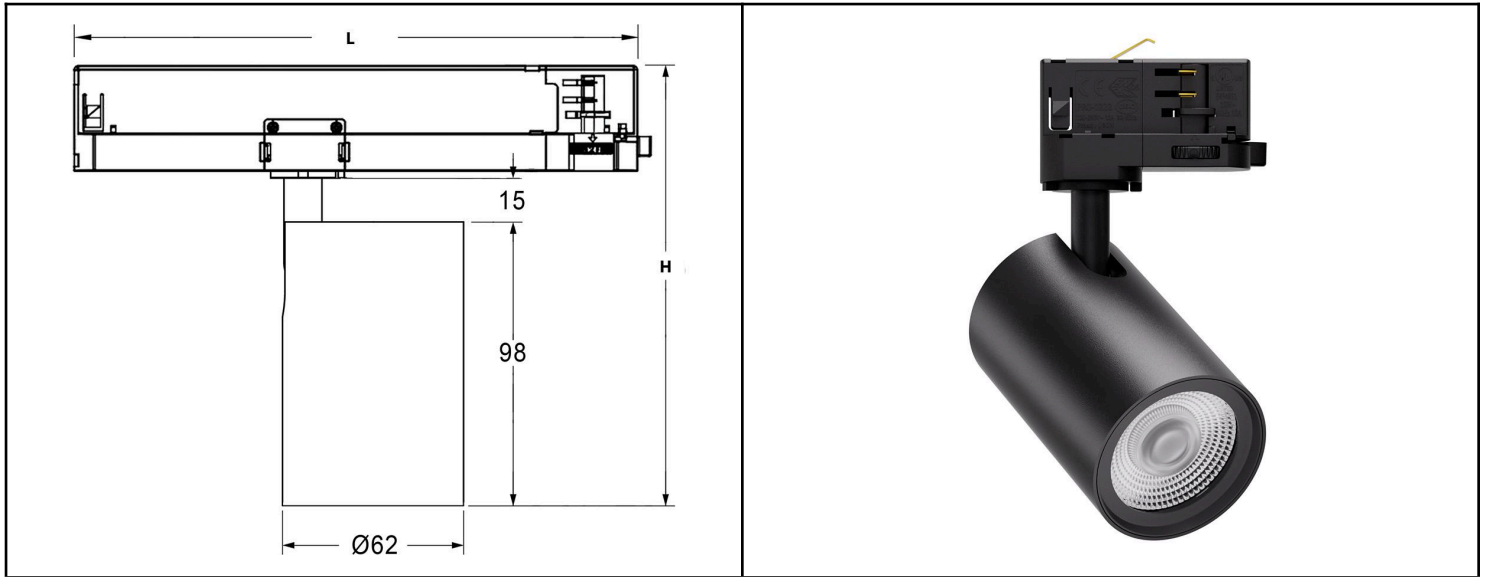

### Product options

Product code	Dimming	Lumen	Color temperature	CRI	Installation	Size, L x H mm	
A2162 ONF	ON/OFF	1000	2700/3000/4000K	97	2/ 3 /4 wires track adapter	L80 x H157	
A2162 TRB	TRIAC Dim						
A2162 DOL	Dimmer on lamp						
A2162 DCT	Dimmer on lamp	800	3000-4000-5700 K CCT switchable 3000K to 2000K	90			
A2162 DTW	TRIAC Dim						
A2162 DAI	DALI, adapter 6 wires or 4 wires	1000	2700/3000/4000K	97	4/6 wires track adapter	L255 x H163	
A2162 INT	NO-Dim	1100				Only 4 Wire Track Adapter	L162 x H159
A2162 TRI	TRIAC Dimmable						L250 x H158
A2162 DOA	1-10V Dimmer on adapter						L186 x H165
A2162 CAB	CASAMBI						L231 x H163
A2162 DAB	DALI					6 wires track adapter	L255 x H163
A2162 RFC	RF 2.4G RC	800	2700~5700K	90	2/3/4 Wire Track Adapter	L204 x H190	
A2162 CAC	CASAMBI						

Available accessories honeycomb, barn doors, softening lens cover, snoot, oval lens cover and wide flood lens cover.



# SPOTLIGHT WITH FIXED LENS

## KVP-A2162 12



karjalanvalaistuspalvelu.fi | info@karjalanvalaistuspalvelu.fi | 040 900 6950

### SPECIFICATION

Luminaire type	spotlight
Environment	indoor
Body material	aluminum
Finish color	matt black / white
Operating	-20 ~ +40°C
Dimensions	D 62mm H 98 mm
Warranty	5 years
Beam angle	15° / 24° / 36° / 60°
Input volt	AC 220 - 240 V
Power	12W
Power factor	>0.92
Lifespan	50 000 hrs
Certificates	CE-EMC, ROHS



### APPLICATIONS

- museums, art galleries, exhibition halls
- stores and shops
- cafes and restaurants

### FEATURES

- art gallery level lighting
- Beam angles 15° / 24° / 36° / 60°
- big range of dimming options

The information is for your reference only, we reserve the right to make alterations in the interest of improving our products.