


SPOTLIGHT WITH FIXED LENS

KVP-A2190 20 | 25



karjalanvalaistuspalvelu.fi | info@karjalanvalaistuspalvelu.fi | 040 900 6950

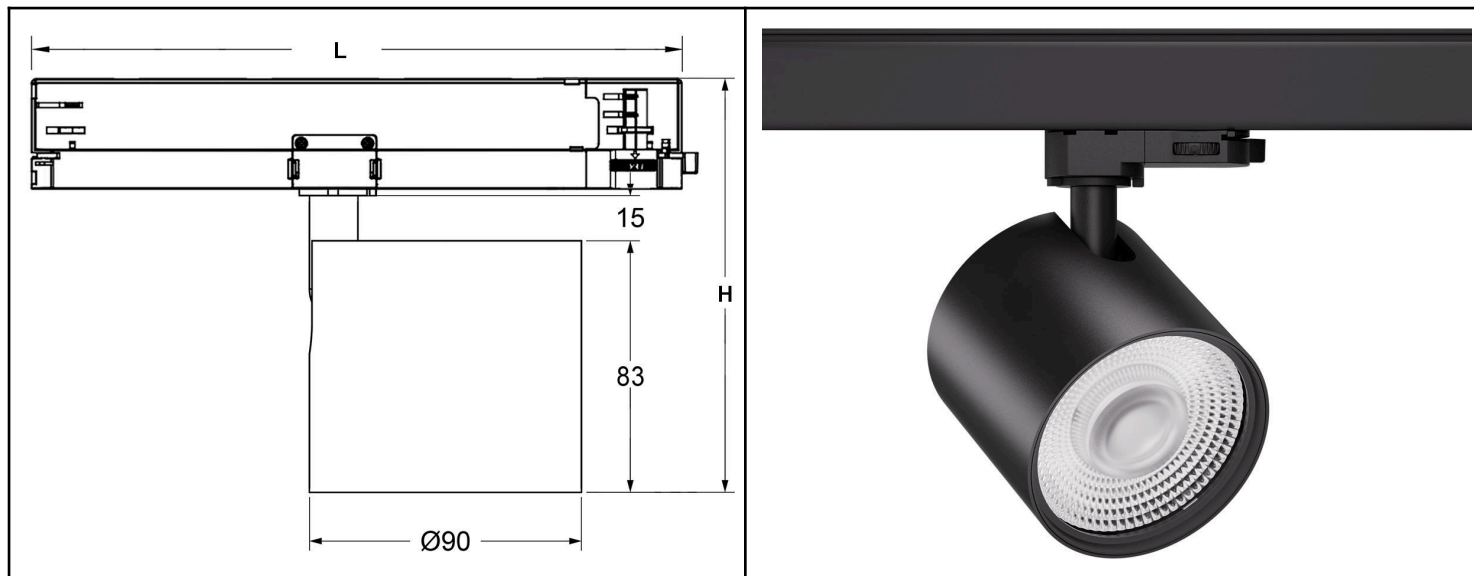

Product options

Product code	Dimming	Power	Lumen	Color temperature	CRI	Installation	Size, L x H mm
A2190 ONF	ON/OFF	20	2000	2700/3000/4000K	97	2/ 3 /4 wires track adapter	L90 x H142
A2190 TRB	TRIAC Dim						
A2190 DOL	Dimmer on lamp						
A2190 DCT	Dimmer on lamp			3000-4000-5700 K CCT switchable	90		
A2190 DAI	DALI, adapter 6 wires or 4 wires	25	2500	2700/3000/4000K	97	4/6 wires track adapter	L162 x H145
A2190 INT	NO-Dim					Only 4 Wire Track Adapter	L250 x H143
A2190 TRI	TRIAC Dimmable						L186 x H150
A2190 DOA	1-10V Dimmer on adapter					6 wires track adapter	L255 x H148
A2190 CAB	CASAMBI						
A2190 DAB	DALI						
A2190 RFC	RF 2.4G RC	20	1600	2700~5700K	90	2/3/4 Wire Track Adapter	L220 x H175
A2190 CAC	CASAMBI						

Available accessories honeycomb, barn doors, softening lens cover, snoot, oval lens cover and wide flood lens cover.



SPOTLIGHT WITH FIXED LENS

KVP-A2190 20 | 25



karjalanvalaistuspalvelu.fi | info@karjalanvalaistuspalvelu.fi | 040 900 6950

SPECIFICATION

Luminaire type	spotlight
Environment	indoor
Body material	aluminum
Finish color	matt black / white
Operating	-20 ~ +40°C
Dimensions	D 90mm H 83 mm
Warranty	5 years
Beam angle	15° / 24° / 36° / 60°
Input volt	AC 220 - 240 V
Power factor	>0.92
Lifespan	50 000 hrs
Certificates	CE-EMC, ROHS



APPLICATIONS

- museums, art galleries, exhibition halls
- stores and shops
- cafes and restaurants

FEATURES

- art gallery level lighting
- Beam angles 15° / 24° / 36° / 60°
- big range of dimming options

The information is for your reference only, we reserve the right to make alterations in the interest of improving our products.