


FAR UVC STERILIZER EXPANSION PANEL

LN-3PL



karjalanvalaistuspalvelu.fi | info@karjalanvalaistuspalvelu.fi | 040 900 6950

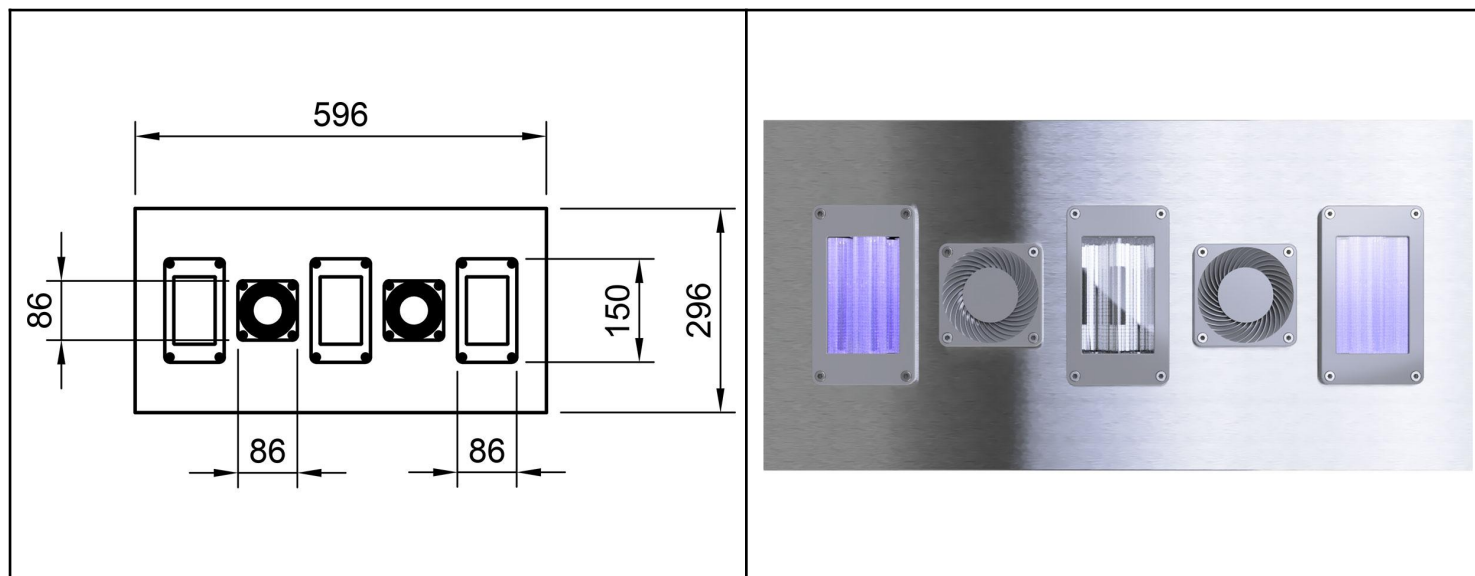

GENERAL DATA

Rated Input voltage:	220-240 V
Frequency:	50 Hz
Dimensions:	596 x 196 x 50 mm
Installation:	Surface Recessed Pendant mounting
Environment:	Indoor
Body material:	Brushed stainless steel, ABS
Color:	Silver
Operating temperature:	-10°C ~ 40°C
Humidity:	< 93% RH
IP rating:	IP 20

UVC DATA

Rated power:	60 W (3x20W)
Rated Input voltage:	24 VDC
UVC radiation:	44,4 µW/cm² per second
Wavelength:	222 nm
Far UVC filter	Pure quartz glass
Beam angle:	100°

Far uvc 222nm sterilizer expansion panel

This device can work stand-alone or together with the LN222-1PL Smart sterilizer panel or LED light panel. It has automatic 3-step power control: 20 / 40 / 60 watts.

Controlled by two sensors: PIR and laser distance sensor. In the case of joint work with the LN222-1PL Smart sterilizer panel, it is controlled by the SmartLife (TuyaSmart) mobile application.

Stainless steel body.

Independent cooling system for UV modules.

The plastic covers of the modules can be painted in any color.



FAR UVC STERILIZER EXPANSION PANEL LN-3PL



karjalanvalaistuspalvelu.fi | info@karjalanvalaistuspalvelu.fi | 040 900 6950


APPLICATIONS

- Any public indoor spaces
- Hospitals, laboratories
- Offices, shops, cafes, restaurants

FEATURES

- Safe for humans and pets
- 3-step power control
- Brushed stainless steel housing

The perfect combination

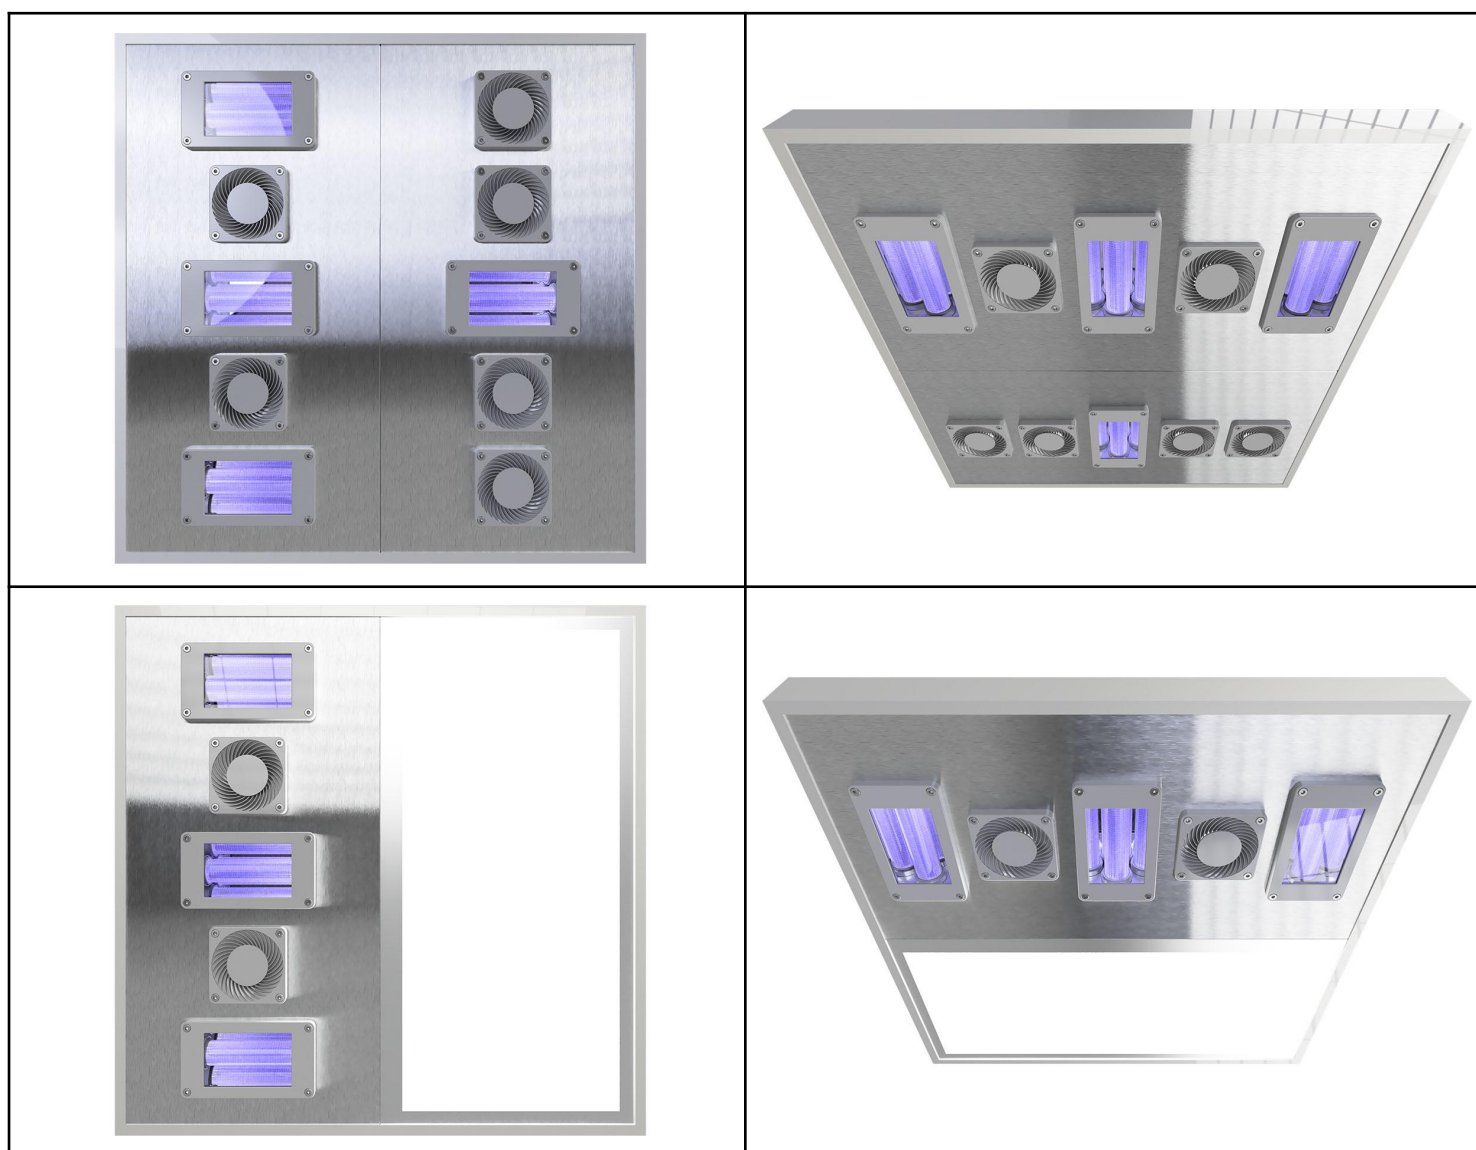

The information is for your reference only, we reserve the right to make alterations in the interest of improving our products.