


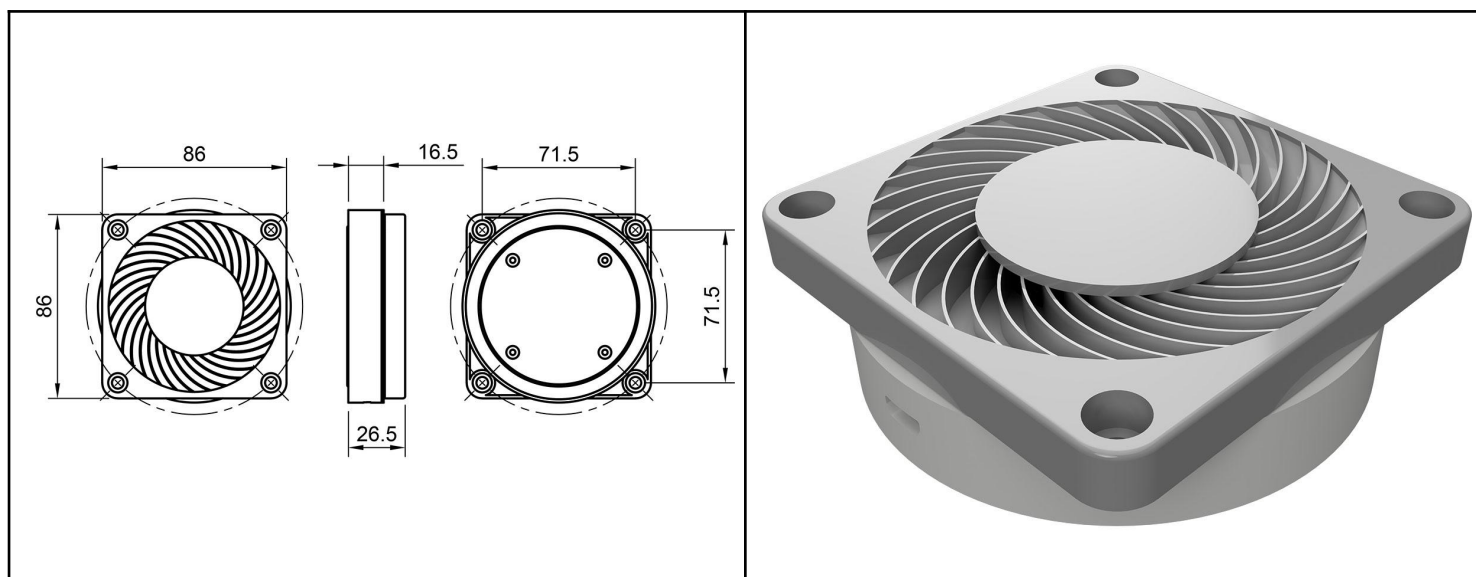

SPECIFICATION

Input

Voltage:	5A DC micro USB
Working current:	10 - 496 mA
Power supply:	USB 5V/1A
Communication protocol:	WiFi / ZigBee

Sensor Parameters


Range (Formaldehyde):	0-10.00 mg/m ³
Range (VOC):	0-99.9 ppm
Range (Carbon dioxide):	0-1000 ppm
Range (Temperature):	-20 ~ 85 °C
Range (Humidity):	0-95 %
Range (PM2.5):	0-1000 ug/m ³

Smart air quality monitor module

Designed for the entire LN™ product line. Can work as a standalone device.
Cutting hole is 80-82 mm.

The 5-in-1 intelligent air quality monitoring module can be used to check environmental parameters such as formaldehyde, VOC, CO₂, temperature and humidity.

Configuration, control and management through the Smart Life mobile application. Two options: WiFi and ZigBee.

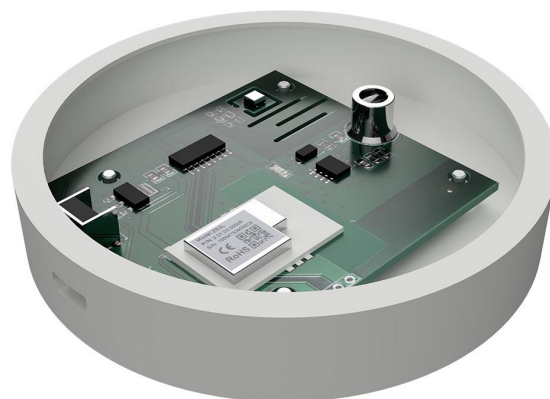


SMART AIR QUALITY MONITOR MODULE

LN-MAM



karjalanvalaistuspalvelu.fi | info@karjalanvalaistuspalvelu.fi | 040 900 6950

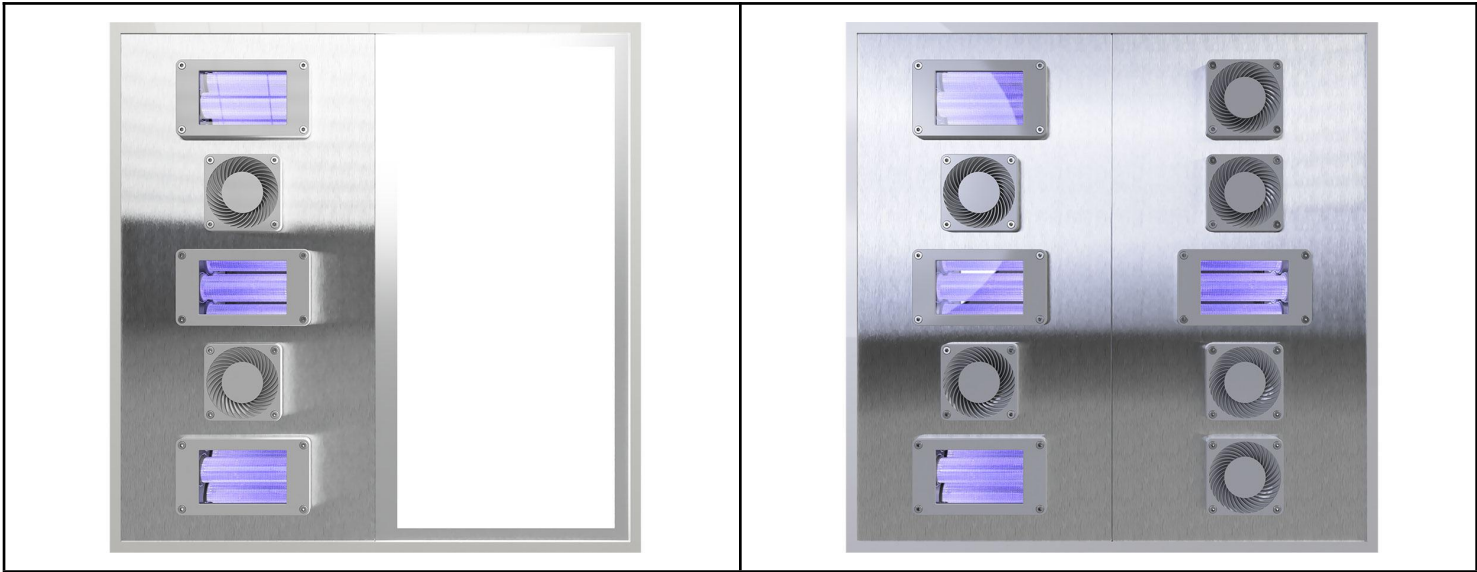

APPLICATIONS

- Lumenord™ products
- Standalone installation

FEATURES

- 5-in-1
- WiFi or ZigBee with SmartLive (Tuya) app

The information is for your reference only, we reserve the right to make alterations in the interest of improving our products.